


# GT-550 Indy

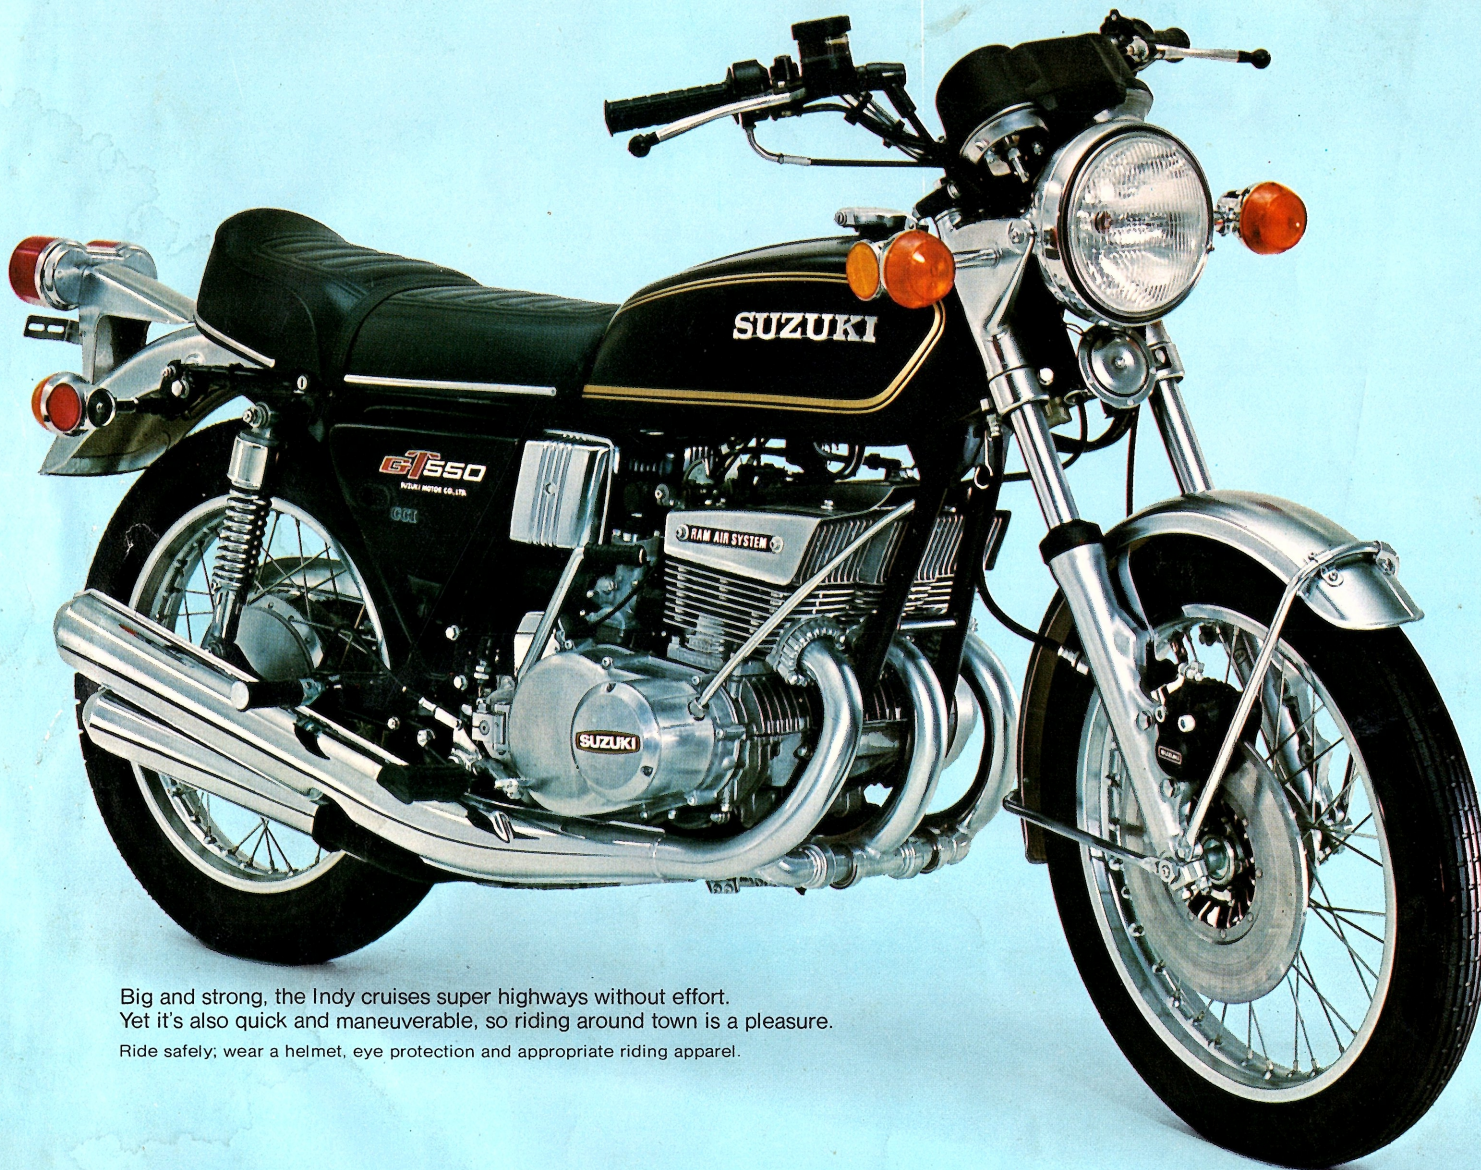

Big and strong, the Indy cruises super highways without effort.  
Yet it's also quick and maneuverable, so riding around town is a pleasure.  
Ride safely; wear a helmet, eye protection and appropriate riding apparel.

Engine Type	Two-stroke, Ram Air-cooled, three cylinder
Displacement	543 cc
Horsepower	48.5 hp/6,500rpm (S.A.E. NET)
Torque	42.8 ft lb/5,000rpm
Carburetor	Three, VM28SC
Compression Ratio	6.7:1
Bore & Stroke	61.0×62.0mm
Starter System	Electric and kick
Transmission	5-speed, constant mesh
Suspension:	
Front fork	Telescopic, oil-dampened
Rear swing arm	Oil-dampened, 5-way adjustable
Ground Clearance	5.7 in
Brakes: Front	Hydraulic caliper disc
Rear	Internal expanding
Tires: Front	3.25H19-4PR
Rear	4.00H18-4PR
Fuel Tank Capacity	4.0 gal
Oil Tank Capacity	2.5 pt
Length	86.4 in
Width	32.1 in
Height	45.7 in
Wheel Base	57.7 in
Dry Weight	441 lbs
Color	Jet black, Candy orange

**SPECIAL FEATURES:**  
Ram Air Cooling—Electronic Digital Gear Indicator—Synchronized Carburetor Linkage—Crankcase Cylinder Injection (CCI) Automatic Lubrication—Electric Starter.

All prices and specifications subject to change without notice.



Warranty covers all internal parts of cylinder head, block and transmission for 12 months or 12,000 miles. Purchaser must comply with Owner's Manual instructions: mail registration to Suzuki within 48 hours, and receive service checks from an authorized Suzuki dealer at 750, 2,000 and every 2,000 miles thereafter during warranty period.

**U.S. Suzuki Motor Corporation,**  
Santa Fe Springs, California  
90670.

Printed in Japan  
Part No. 99404-75001

# SUZUKI